


K23-33 RS City

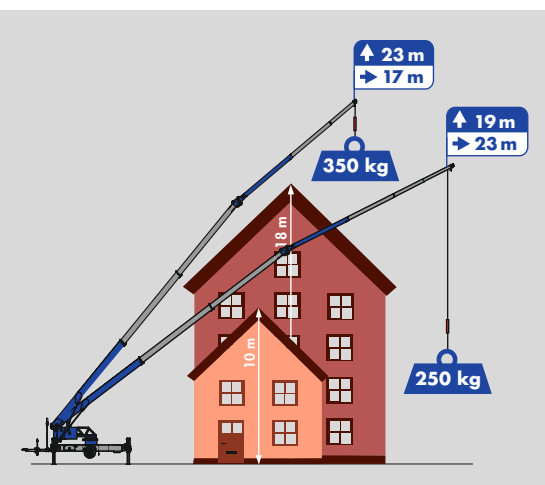

Hook height **32.8 m**/Boom length **34.1 m**

Max. capacity **1,500 kg**

23 m Working range with **250 kg**




K23-33 RS City


Equipment



Klaas
Boom system



H-Outriggers




Automatic
levelling



Twin luffing
cylinders



Double derricking
cylinders



Telescopic
winch



Continuous
rotation



Crane
control system




Radio remote
control



Drive
concept



Full panelling



Retractable
drawbar



Self-drive
mechanism (opt.)



Working
platform (opt.)



Accessory
fix system (opt.)



Hybrid drive (opt.)



Personal safety
mode (opt.)



Technical specifications

Hook load	1,500 kg
Hook height	32.80 m
Boom length	34.10 m
Outrigger width (min.)	2.85 m
Outrigger width (min. with HA)	3.60 m
Outrigger width (max.)	5.04 m
Winch capacity	1,500 kg
Boom (1,500 kg)	4.97 m
Extension 1 (800 kg)	8.26 m
Extension 2 (500 kg)	10.39 m
Extension 3 (250 kg)	12.31 m
Vehicle dimensions	9.24 x 2.27 x 2.59 m
Towing capacity	3.5 t


Working range

Load	Working range	Height
1,500 kg	4.50 m	22.00 m
1,000 kg	8.50 m	20.50 m
800 kg	9.50 m	24.50 m
500 kg	14.00 m	21.50 m
350 kg	17.00 m	23.00 m
250 kg	23.00 m	19.00 m

Working range diagram

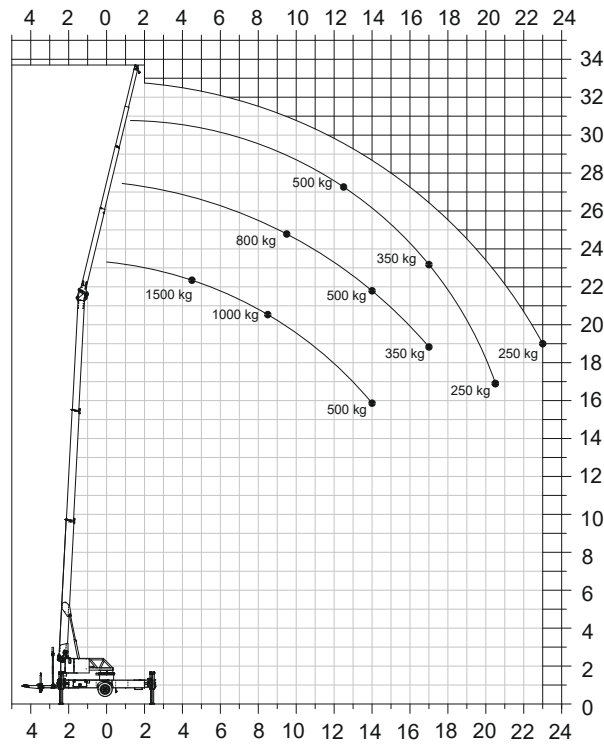

Platform operation

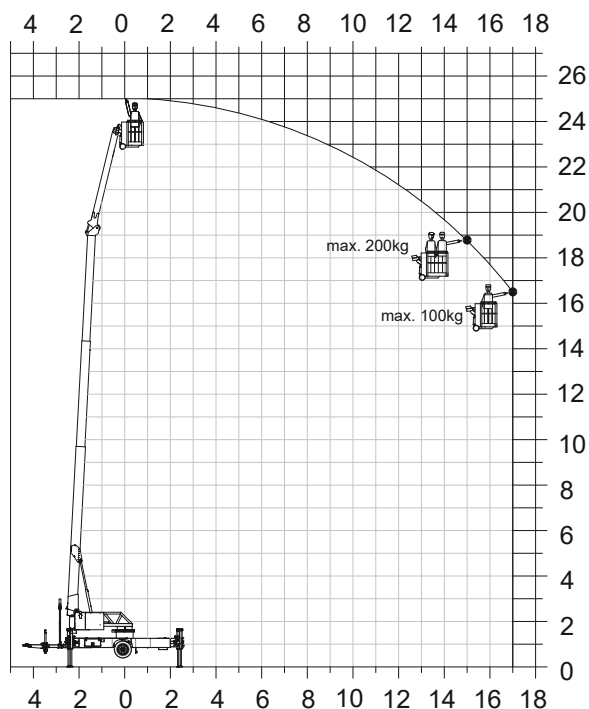

Subject to technical changes. All specifications are approximate. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.