


K2300

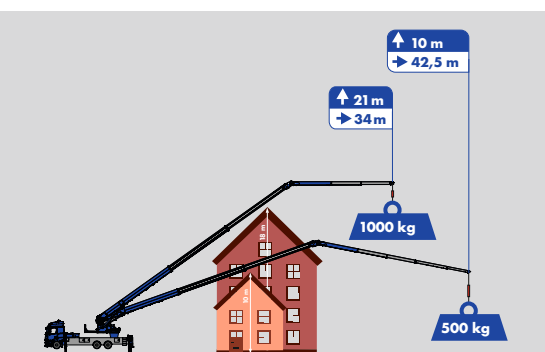

Hook Height 48 m / Boom length 49.5 m

Max. capacity 9,000 kg


26 m Working range with 2,000 kg




Equipment



Klaas
Boom system



H-Outriggers



Automatic
levelling




Hydraulic,
telescopic fly jib



Twin luffing
cylinders



Double derricking
cylinders



Telescopic
winch



Continuous
rotation



Crane
control system



XL Radio
remote control



Hybrid drive



Full panelling



Personal
safety mode



Working
platform (opt.)



Accessory
fix system (opt.)



Mounting-/glass
hook (opt.)

Technical specifications

Hook load (stand./opt.)	4.5/9.0 t
Hook height	48.00 m
Boom length	49.50 m
Outrigger width (min.)	3.04 m
Outrigger width (max.)	7.00 m
Winch capacity	4,500 kg
Boom (4,500 kg - 1,500 kg)	5.75 - 12.47 m

Extension 3+4 (750 kg) 18.45 m

Truck * Total weight (min.) ≥ 26.00 t

* depending on truck type

Working range*



Load	Working range	Height
4,500 kg	10.00 m	31.80 m
4,000 kg	12.00 m	30.80 m
3,000 kg	19.00 m	25.50 m
2,000 kg	26.00 m	21.00 m
1,000 kg	34.00 m	21.00 m
500 kg	42.50 m	9.80 m

Working range 9t Capacity**


Load	Working range	Height
9,000 kg	7.00 m	11.80 m
6,500 kg	9.50 m	7.50 m

**with 2-fall instead

Working range diagram*

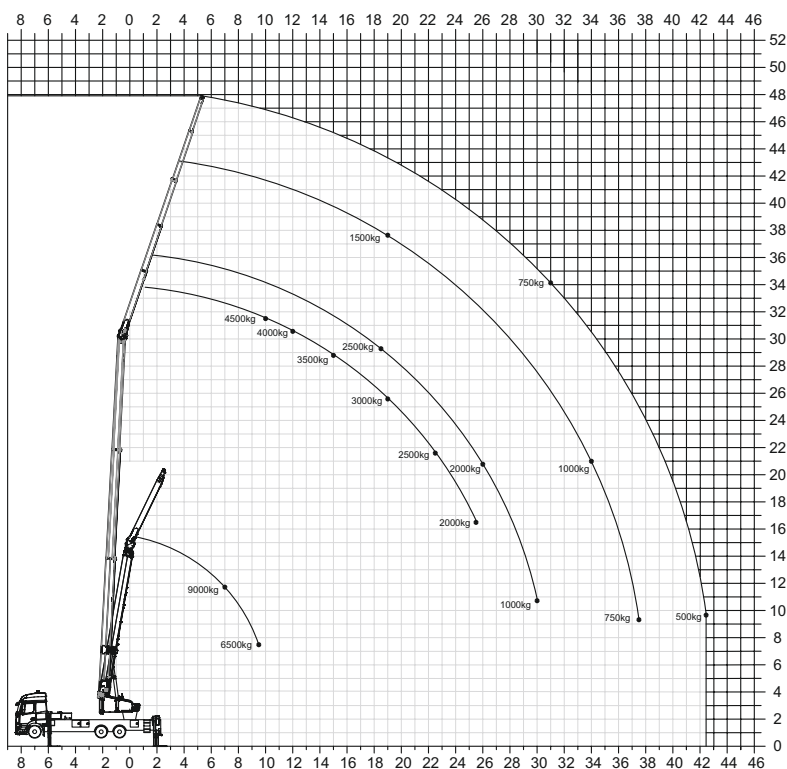

Platform operation*

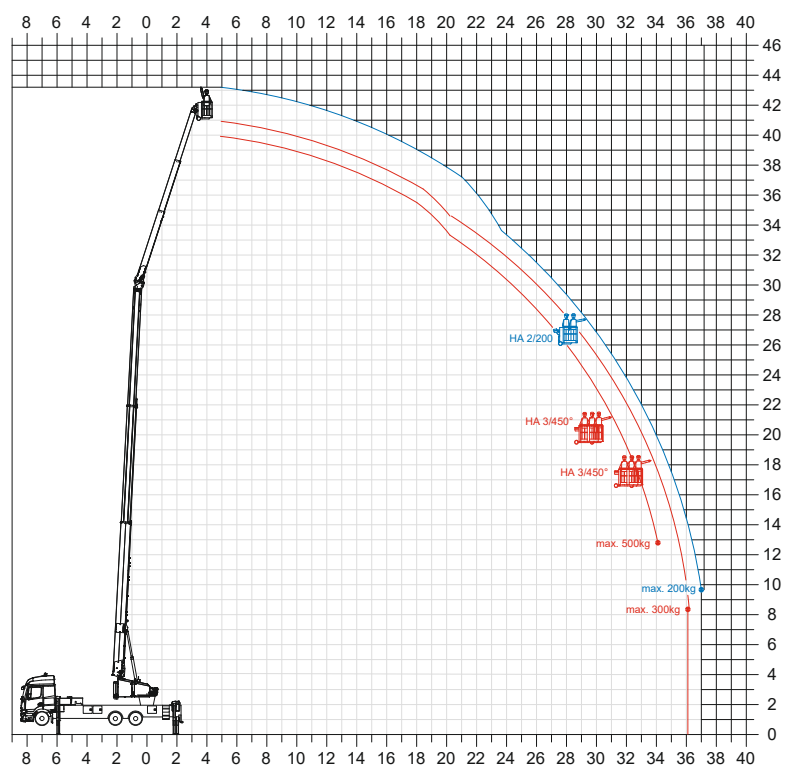

*Working range vary, depending on truck type.

Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.