


K700



Hook height **34.5 m**/Boom length **36.5 m**
Max. capacity **3,000 kg**
2-fold hydraulic telescopic fly jib

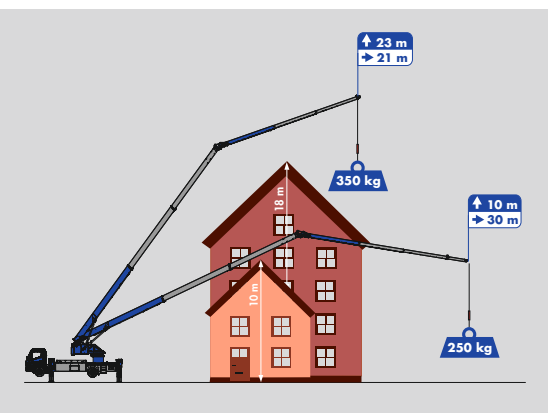

K700


Equipment



Klaas
Boom system



H-Outriggers



Automatic
levelling




Hydraulic,
telescopic fly jib



Twin luffing
cylinders



Double derricking
cylinders



Telescopic
winch



360°
continuous
rotation



Crane
control system



Radio remote
control



separator
Dieselmotor



Full panelling



Personal
safety mode



Hybrid drive
(opt.)



Battery-powered
electric motor (opt.)



Working
platform (opt.)



Accessory
fix system (opt.)



Mounting-/glass
hook (opt.)

Technical specifications

Hook load (stand./opt.)	1.6/3.0 t
Hook height	34.50 m
Boom length	36.50 m
Outrigger width (min.)	3.03 m
Outrigger width (max.)	5.29 m
Winch capacity	1,600 kg
Boom (1,600 kg - 350 kg)	5.00 - 11.65 m
Extension 3 (250 kg)	13.90 m
Truck * Total weight (min.)	≥ 7.49 t

* depending on truck type

Working range*



Load	Working range	Height
1,600 kg	6.00 m	23.00 m
1,000 kg	14.00 m	17.50 m
750 kg	17.00 m	13.50 m
500 kg	18.00 m	23.00 m
250 kg	30.00 m	10.00 m

Working range 3t Capacity**


Load	Working range	Height
3,000 kg	5.00 m	8.00 m
2,000 kg	6.50 m	5.00 m

**with 2-fall instead

Working range diagram*

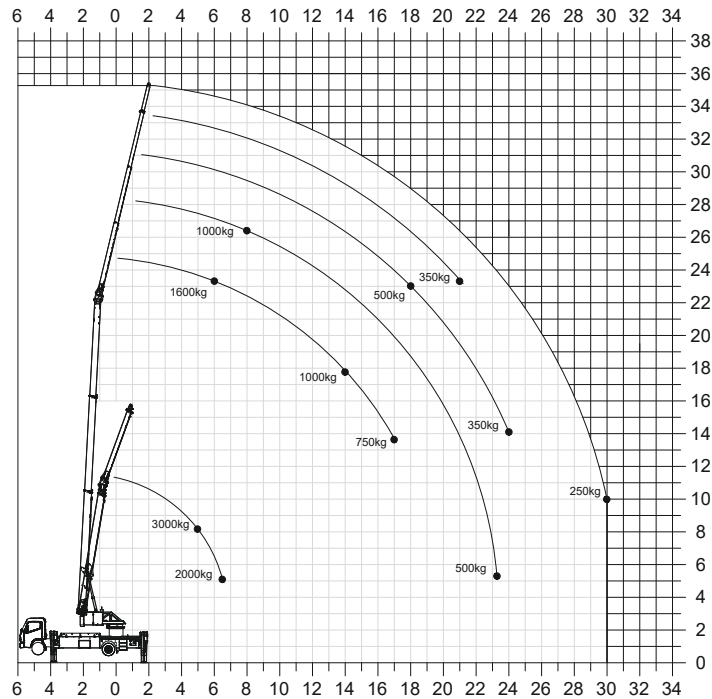

Platform operation*

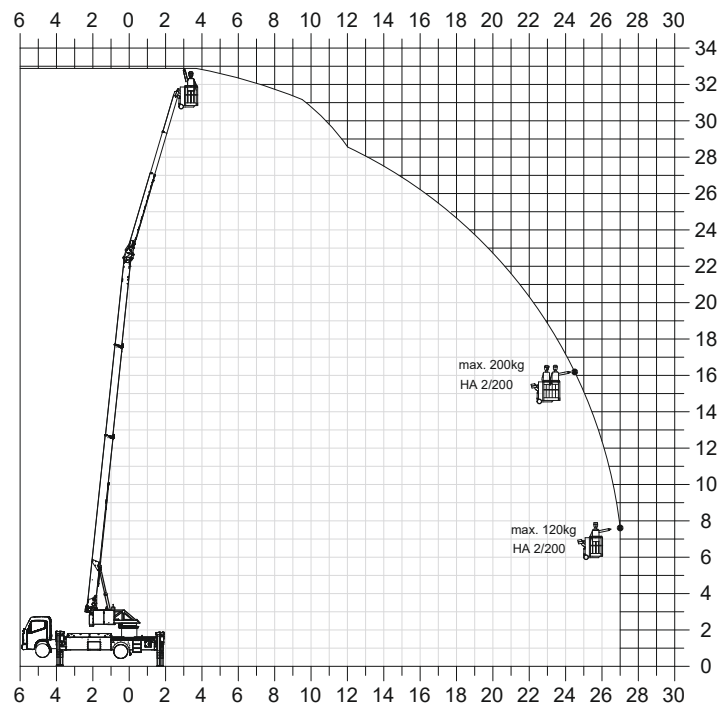

*Working range vary, depending on truck type.

Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.