


K900

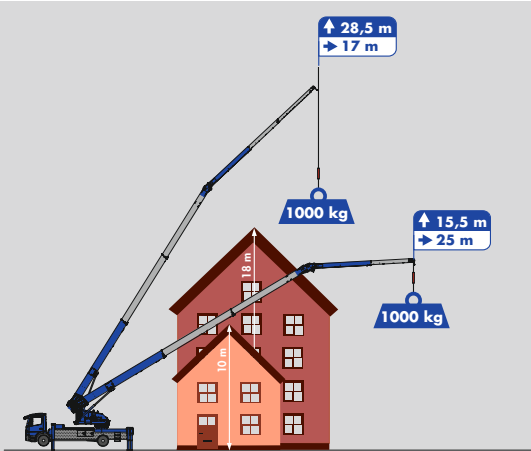

Hook height 38.4 m / Boom length 39.0 m

Max. capacity 5,000 kg

Hydraulic telescopic fly jib

25 m Working range with 1,000 kg




Equipment



Klaas
Boom system



V-Outriggers



Automatic
levelling




Hydraulic,
telescopic fly jib



Twin luffing
cylinders



Double derricking
cylinders



Telescopic
winch



Continuous
rotation



Crane
control system



XL Radio
remote control



Drive
concept



Full panelling



Personal safety
mode



Hybrid drive
(opt.)



Working
platform (opt.)



Accessory
fix system (opt.)



Mounting-/glass
hook (opt.)

Technical specifications

Hook load (stand./opt.)	3.0/5.0 t
Hook height	38.40 m
Boom length	39.00 m
Outrigger width (min.)	3.04 m
Outrigger width (max.)	5.48 m
Winch capacity	3,000 kg
Boom (3,000 kg - 1,500 kg)	5.50 - 12.05 m

Extension 3 (350 kg)	13.78 m
Truck * Total weight (min.)	≥ 16 t

*depending on truck type

Working range*



Load	Working range	Height
3,000 kg	7.50 m	25.80 m
2,000 kg	15.00 m	21.00 m
1,000 kg	25.00 m	15.50 m
350 kg	33.00 m	9.00 m

Working range 5 t Capacity**


Load	Working range	Height
5,000 kg	6.50 m	8.20 m
4,000 kg	7.50 m	5.20 m

**with 2-fall

Working range diagram*

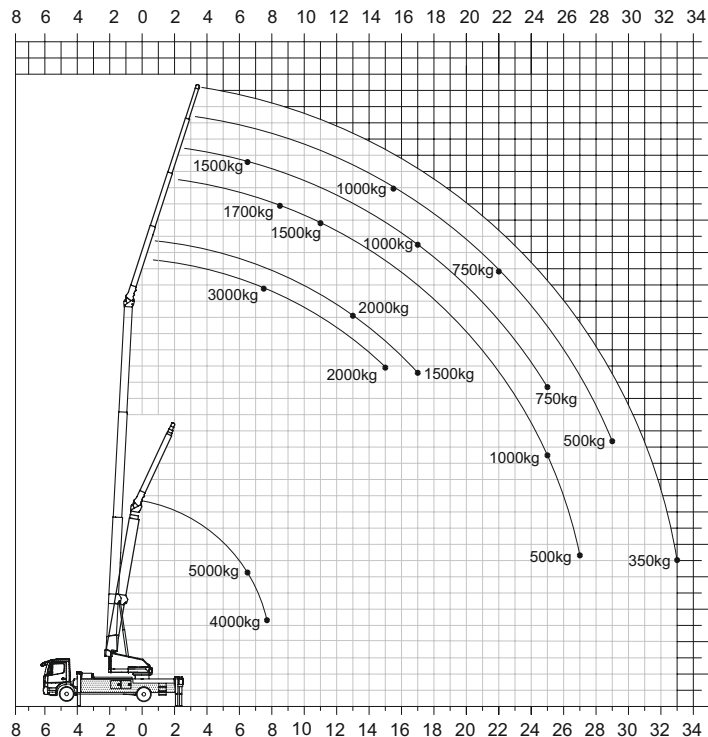

Platform operation*

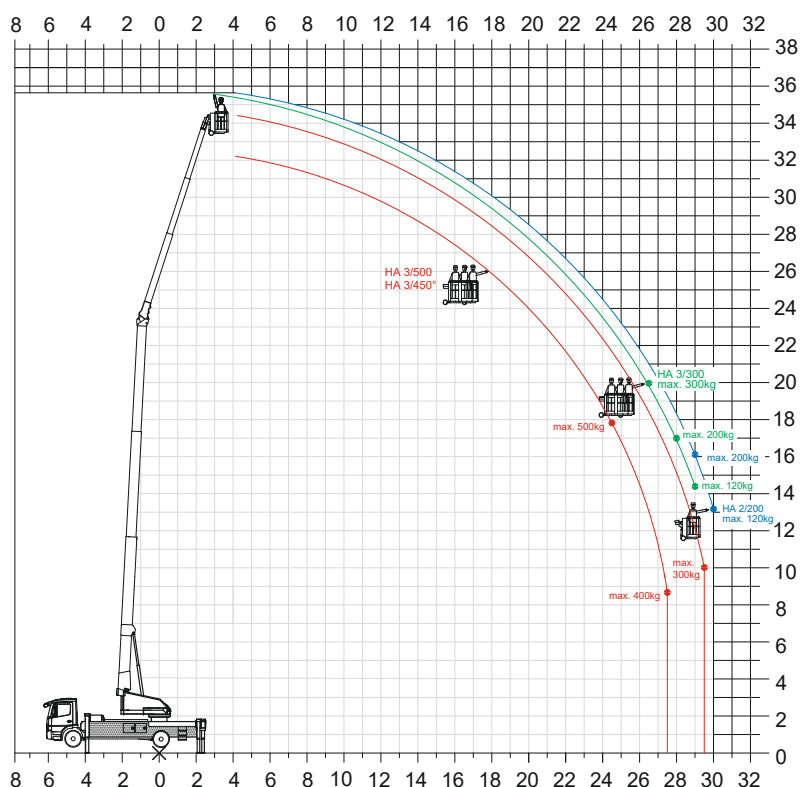

*Working range vary, depending on truck type.

Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.