


**K300 E**



Hook height 29,8 m / Boom length 30,7 m  
 Max. capacity 1.500 kg  
 Powerful battery for long running times

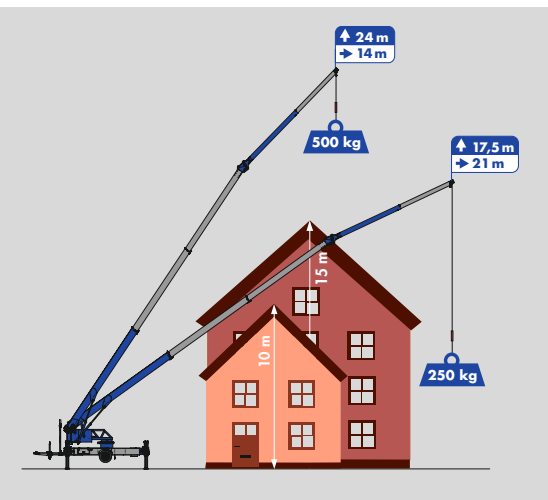


# K300 E


## Equipment



Klaas  
Boom system



H-Outriggers




Automatic  
levelling



Twin luffing  
cylinders



Double derricking  
cylinders



Telescopic  
winch



Continuous  
rotation



Crane  
control system




Radio  
remote control



battery-powered  
electric motor



Full  
panelling



Retractable  
drawbar




Self-drive  
mechanism



Accessory  
fix system (opt.)

## Working range diagram

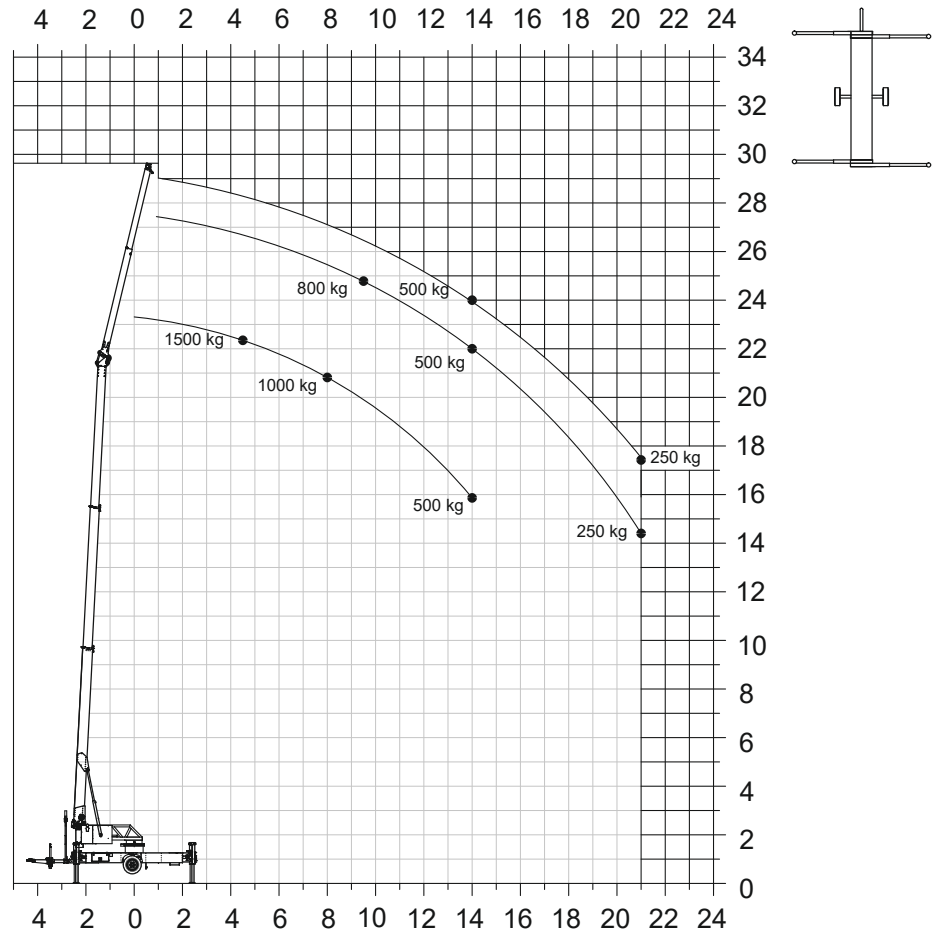

## Technical specifications

Hook load	1,500 kg
Hook height	29.80 m
Boom length	30.70 m
Outrigger width (min.)	2.86 m
Outrigger width (max.)	5.05 m
Winch capacity	1,500 kg
Boom (1.500 kg)	5.46 m
Extension 1 (800 kg)	9.12 m
Vehicle dimensions	9.22 x 2.29 x 2.50 m
Towing capacity	3.5 t

## Working range

Load	Working range	Height
1,500 kg	4.50 m	22.00 m
1,000 kg	8.00 m	20.80 m
800 kg	9.50 m	24.50 m
500 kg	14.00 m	24.00 m
250 kg	21.00 m	17.50 m

### KLAAS Service- & Vertriebs GmbH

Haselburger Damm 25 · D-59387 Ascheberg

Tel.: +49 (0)2593 - 95 92 - 0

info@klaas.com