


K350 E

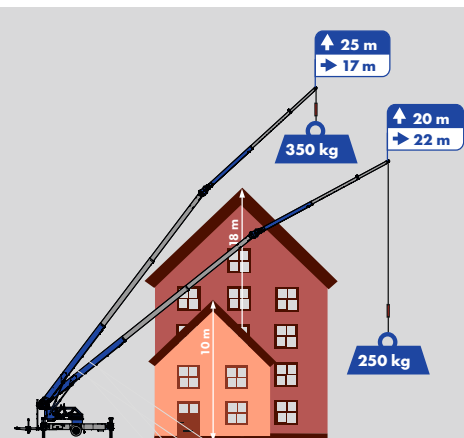

Hydraulic, telescoping fly jib

Incl. automatic levelling

22 m Working range with 250 kg

Powerful battery for long running times



K350 E


Equipment



Klaas Boom system



H-Outriggers



Automatic levelling



Hydraulic, telescopic fly jib



Twin luffing cylinders



Double derricking cylinders



Continuous rotation



Crane control system




Radio remote control



battery-powered electric motor



Full panelling



Retractable drawbar



Self-drive mechanism



Personal Safety Mode



Working platform (opt.)



Accessory fix system (opt.)



Mounting-/glass hook (opt.)



Technische Informationen

Hook load	1,600 kg
Hook height	31.00 m
Boom length	32.80 m
Max. working height HA	29.00 m
Outrigger width (min.)	3.30 m
Outrigger width (max.)	5.04 m
Winch capacity	1,600 kg
Boom (1,600 kg - 800 kg)	4.29 - 8.50 m
Extension 2 (500 kg)	10.70 m
Vehicle dimensions	9.43 x 2.28 x 2.58 m
Towing capacity	3.5 t

Working range

Load	Working range	Height
1,500 kg	4.50 m	23.00 m
1,000 kg	8.50 m	21.00 m
500 kg	16.00 m	14.00 m
350 kg	17.00 m	25.00 m
250 kg	22.00 m	20.00 m

Working range diagram

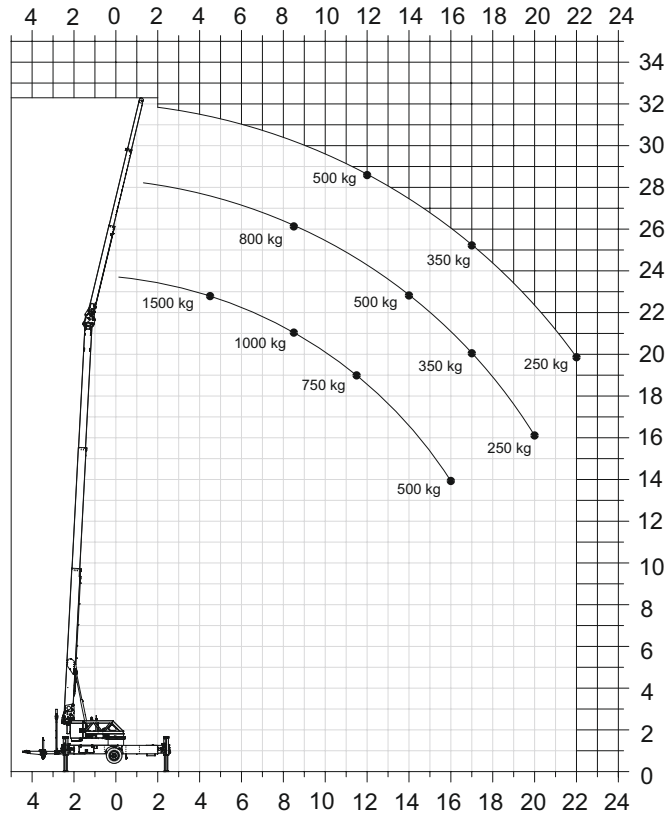

Platform operation

