




Klaas

K700



Working range

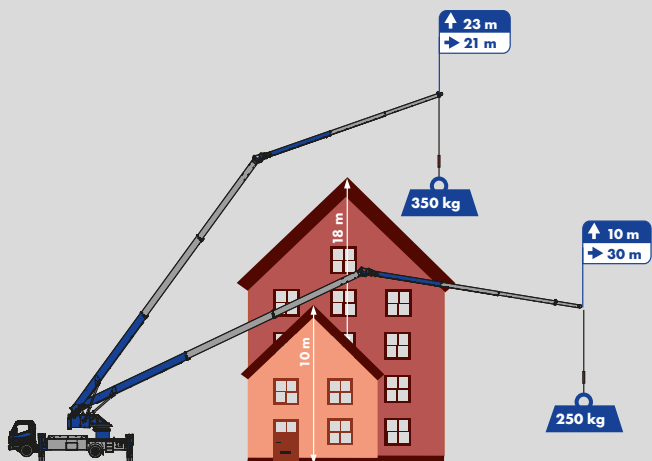


► Hook height 34,5 m / Boom length 36,5 m

► 30 m Working range with 250 kg

► Double hydraulic telescopic fly jib

Working range diagram

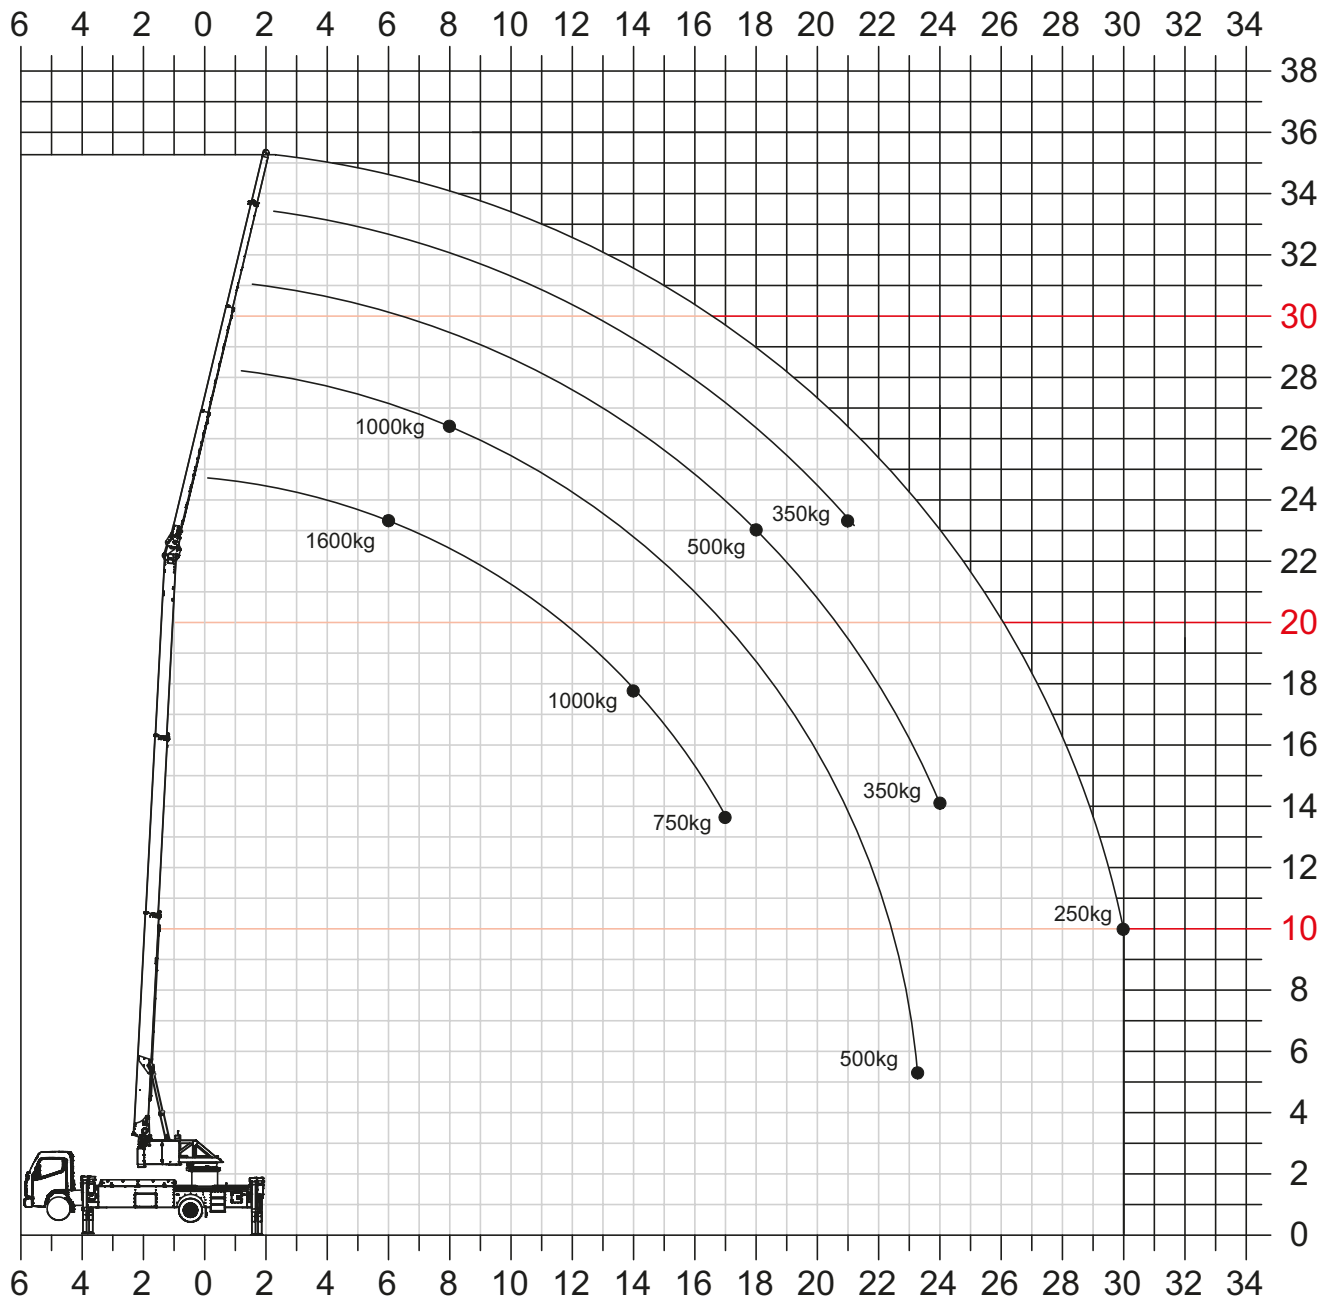


Working range crane operation

Load	Range	Height
250 kg	30.00 m	10.00 m
350 kg	24.00 m	14.00 m
500 kg	18.00 m	23.00 m
750 kg	17.00 m	13.50 m
1,000 kg	14.00 m	17.50 m
1,600 kg	6.00 m	23.00 m

Working range vary, depending on truck type.

Platform operation

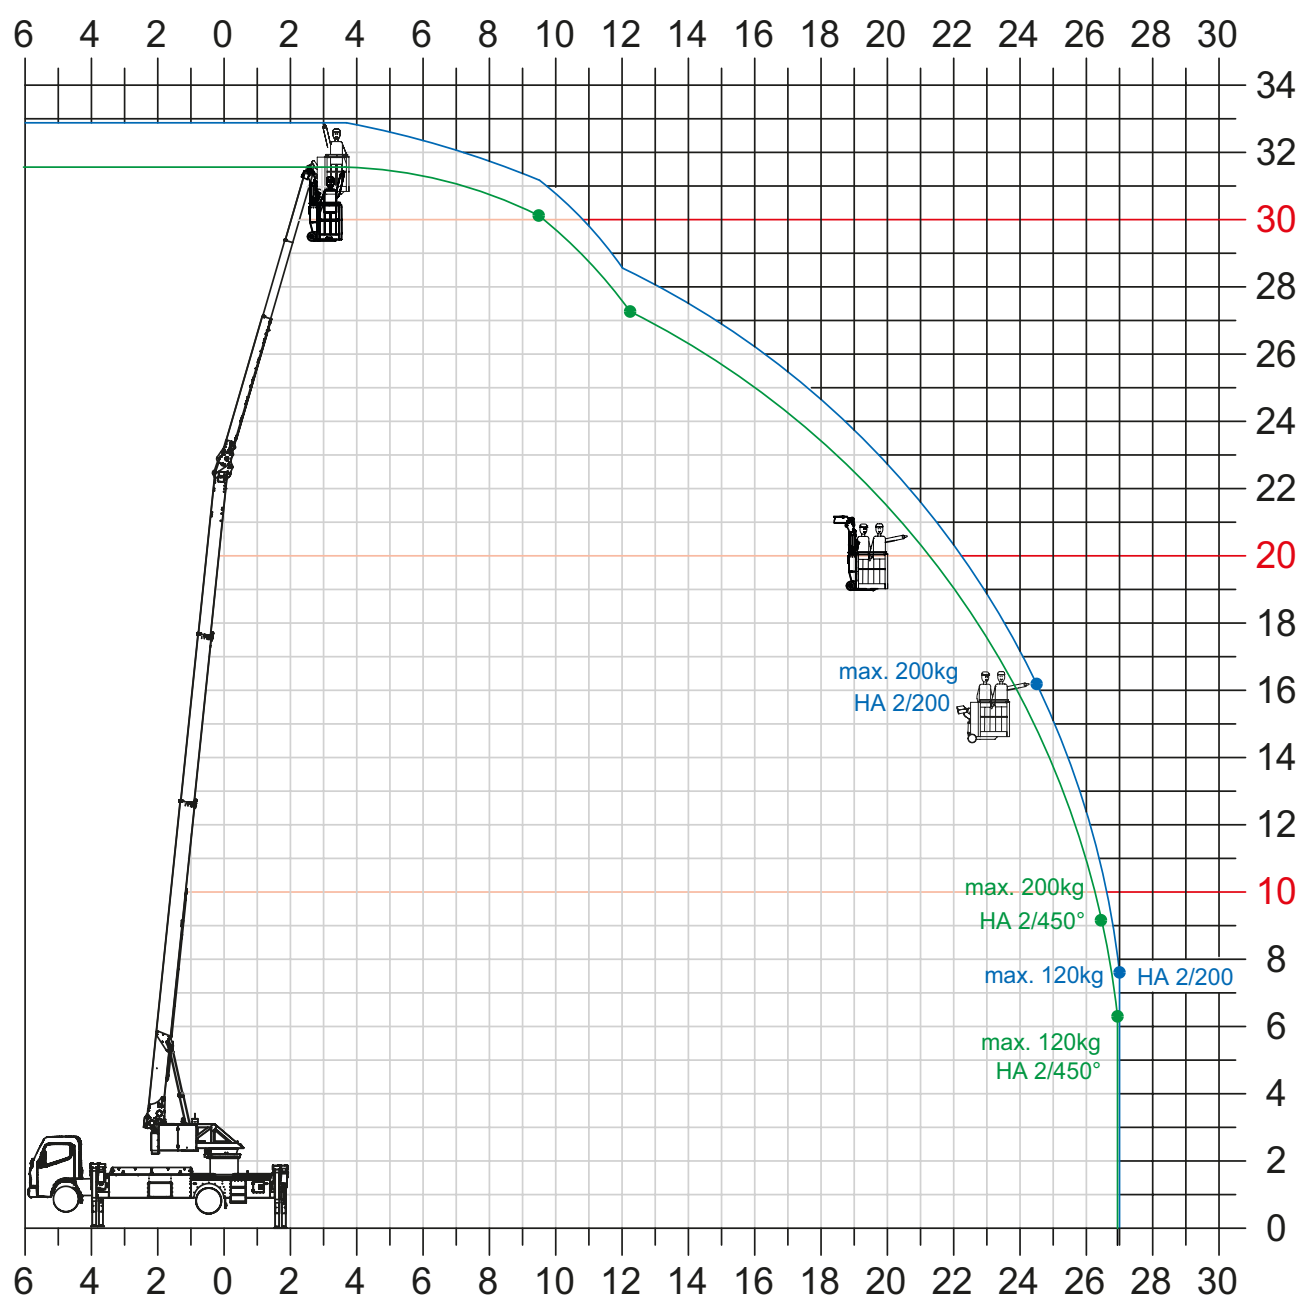

Working range HA 2/200

Load	Range	Height
120 kg	27.00 m	7.50 m
200 kg	24.50 m	16.00 m
max. Working height		32.50 m

Working range HA 2/450°

Load	Range	Height
120 kg	27.00 m	6.00 m
200 kg	26.50 m	9.00 m
max. Working height		31.50 m



Klaas

K700

Technical specifications

Load capacity	
Hook load	1,600 kg
Winch capacity	1,600 kg

Boom	
 Hook height	34.50 m
 Boom length	36.50 m
 Working height up to the boom	22.40 m
Swivel range	Continuous rotation

Fly jib	
Fly jib (1,600 kg)	5.11 m
Extension 1-2 (1,600 kg - 350 kg)	5.11 - 11.91 m
Extension 3 (250 kg)	14.07 m


H-Outriggers	
 Outriggers (max.) L x W	5.52 x 5.29 m
 Outrigger width (min.)	3.03 m
 Outrigger width 1-sided support	4.16 m

Drive concepts	
D	seperate diesel engine
RHX	Hybrid drive
E	battery powered electric motor


Truck	
Truck * Total weight (min.)	≥ 7.50 t

* depending on truck type


Fly jib

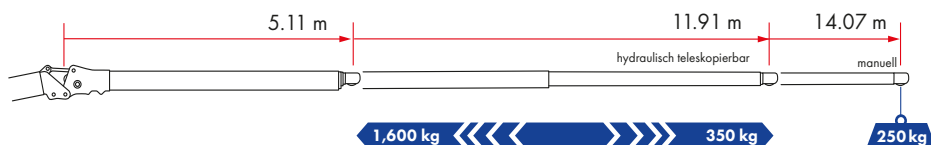

Outriggers

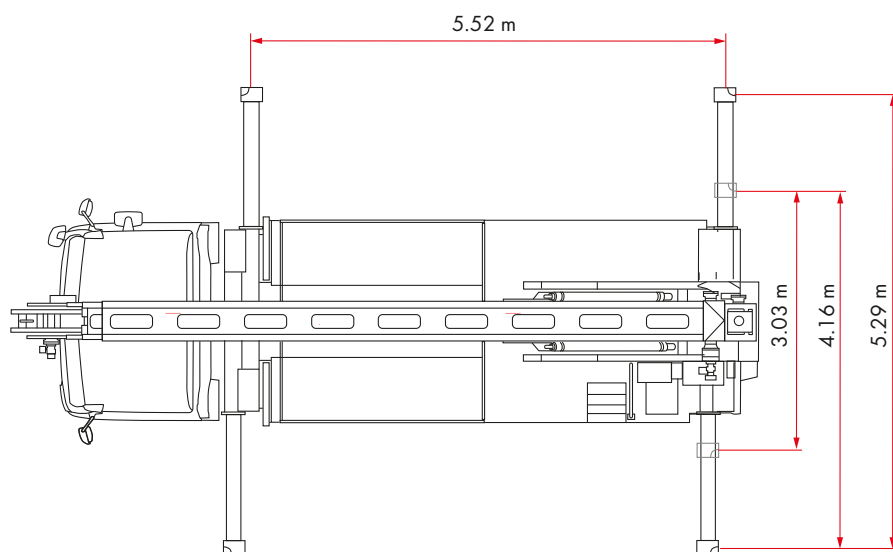

Truck (MAN TGL)

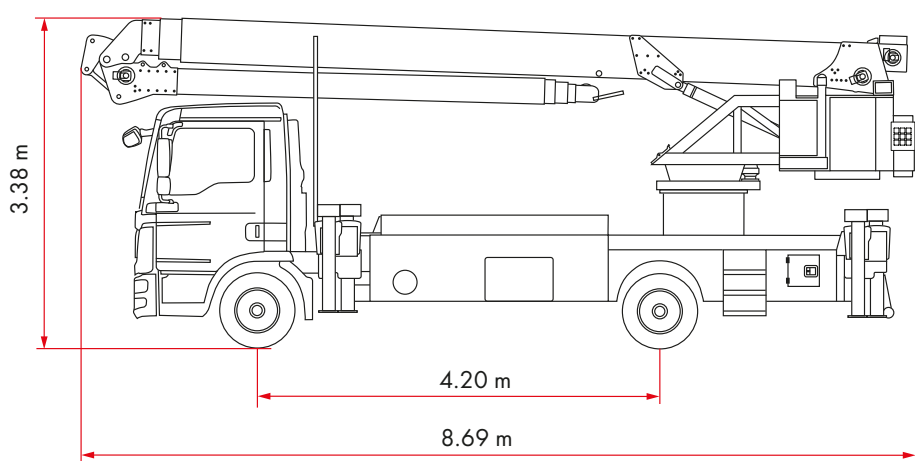


Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.

12/2025



klaas.com

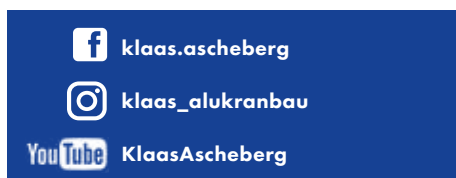

Klaas Service- & Vertriebs GmbH
 Haselburger Damm 25 • D-59387 Ascheberg
 Telefon +49 (0) 25 93 - 95 92-0
 E-Mail: info@klaas.com

klaas24.com