
Klaas K2350



Working range




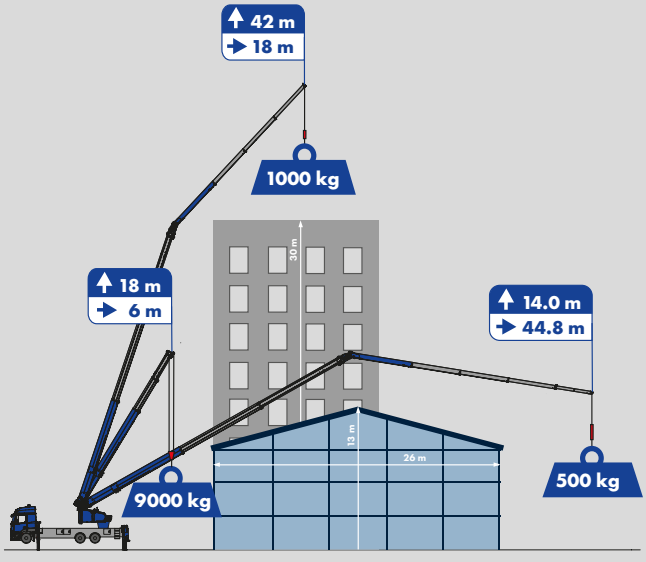

- Max. capacity 9,000 kg (opt.)
- 4,500 kg Winch capacity
- Hook height 50.0 m

08/2026

Working range diagram

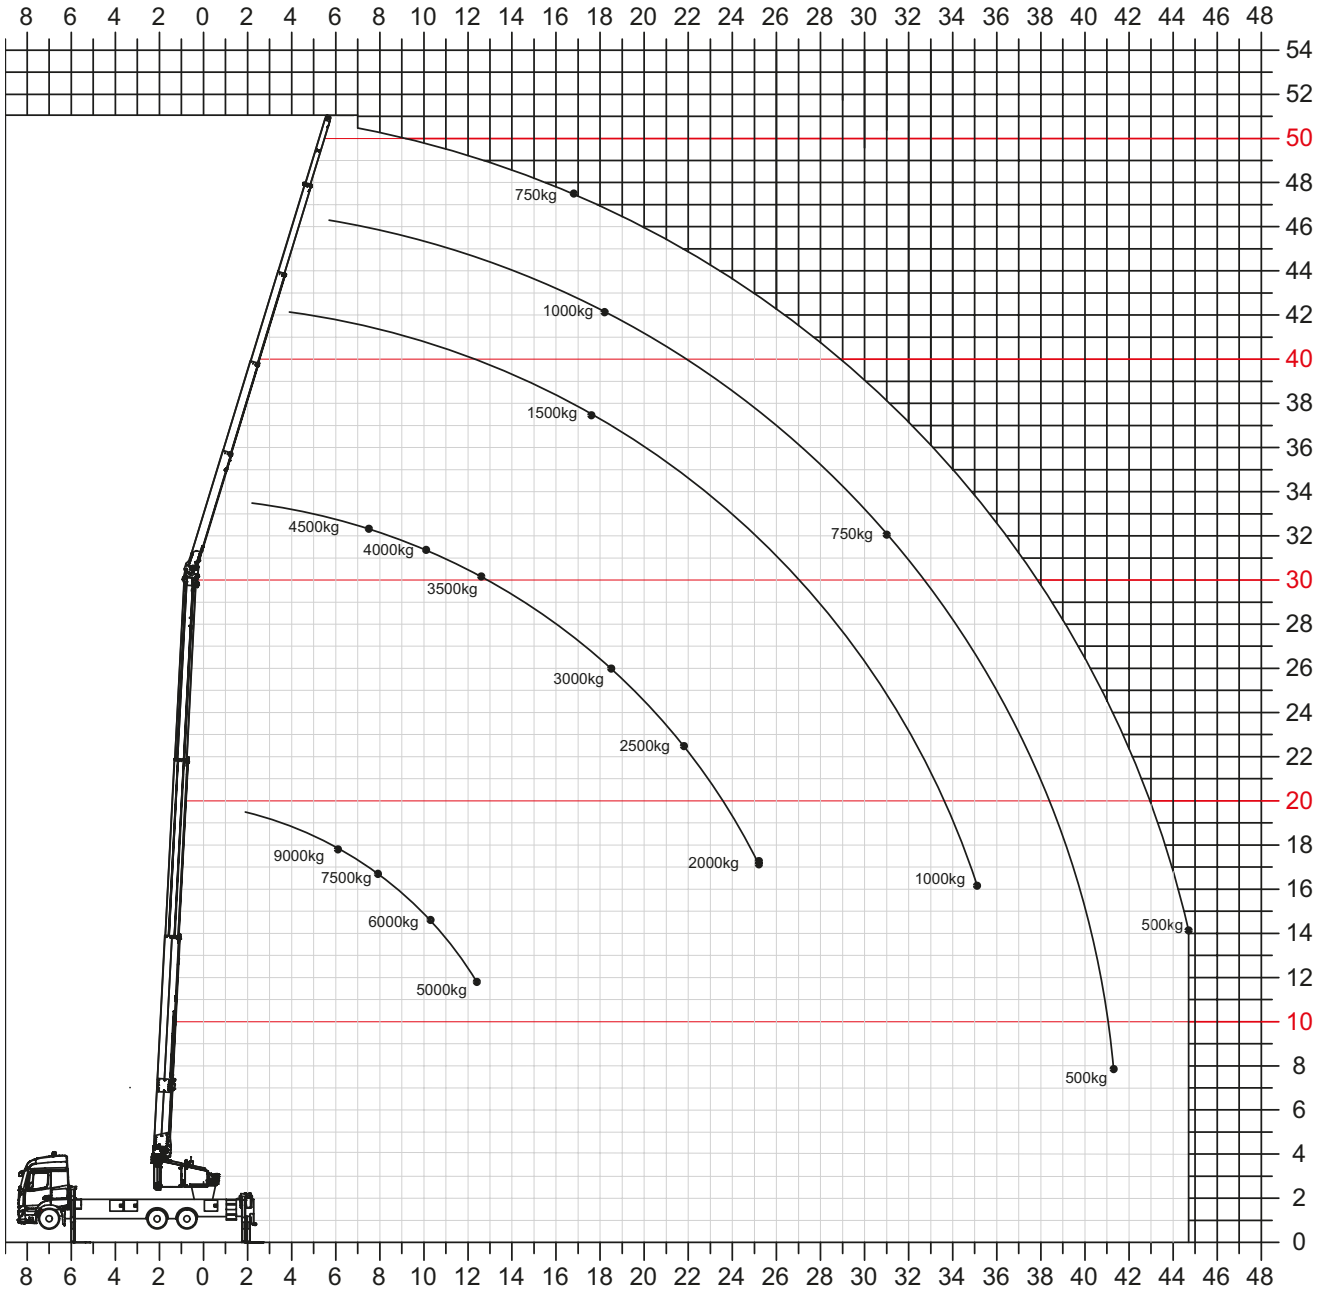

Working range single fall operation (standard)


Load	Range	Height
500 kg	44.80 m	14.00 m
1,000 kg	35.00 m	16.00 m
2,000 kg	25.00 m	17.00 m
3,000 kg	18.50 m	26.00 m
3,500 kg	12.50 m	30.00 m
4,500 kg	7.50 m	32.20 m

Working range two fall operation (optional)

Load	Range	Height
5,000 kg	12.30 m	11.80 m
6,000 kg	10.20 m	14.50 m
7,500 kg	8.00 m	16.70 m
9,000 kg	6.00 m	18.00 m

Working range vary, depending on truck type.

Platform operation

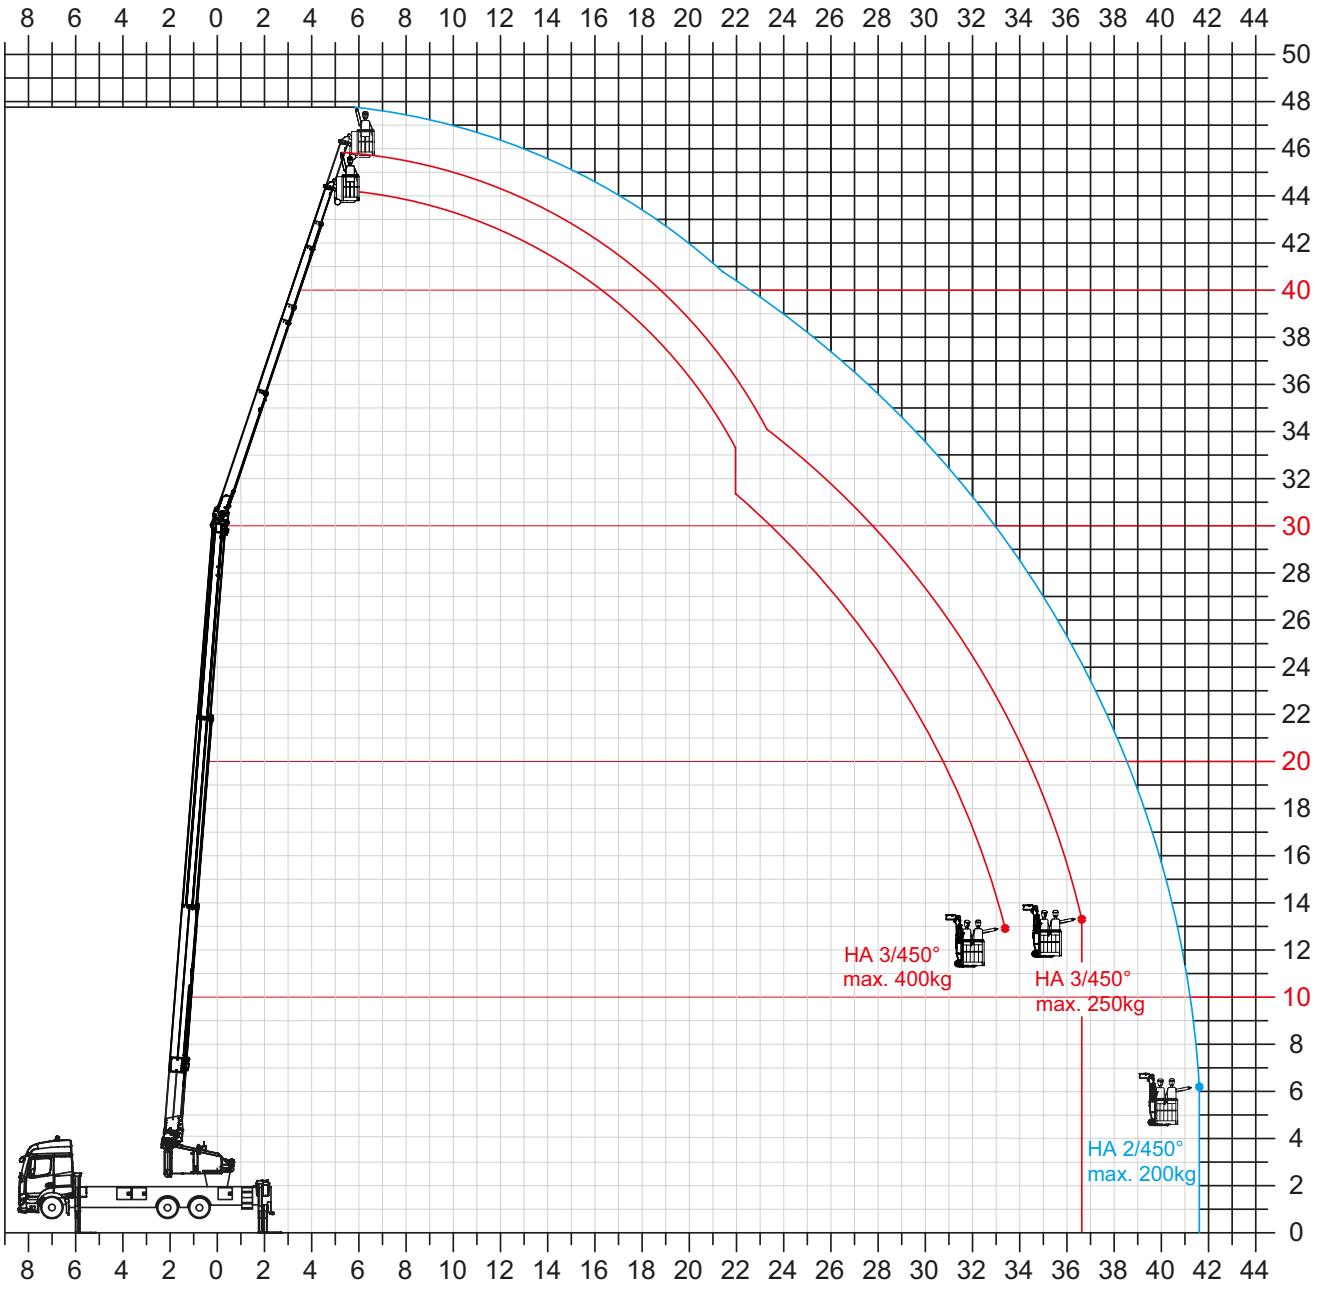

Working range HA 2/450°

Load	Range	Height
200 kg	41.50 m	6.00 m
max. Working height		47.80 m

Working range HA 3/450° and roofing platform

Load	Range	Height
250 kg	36.70 m	13.30 m
400 kg	33.40 m	13.00 m
max. Working height		45.80 m

Working range vary, depending on truck type.

Klaas K2350

Technical specifications

Load capacity	
Single fall operation	4,500 kg
Two fall operation (optional)	9,000 kg
Winch capacity	4,500 kg

Boom	
Hook height	50.00 m
Boom length	52.00 m
Working height up to the boom	30.00 m
Swivel range	Continuous rotation

Fly jib	
Fly jib (4,500 kg)	6.65 m
Fly jib extension 1-3 hydraulic	
Range (3,000 kg - 1,000 kg)	6.65 - 17.50 m
Range (1,000 kg - 750 kg)	17.50 - 18.80 m
Extension 4 (500 kg) manual	21.65 m


H-Outriggers	
Outriggers (max.) L x W	6.99 x 7.34 m
Outrigger width (min.)	3.04 m
Outrigger width 1-sided support	5.19 m

Drive concepts	
RHX	Hybrid drive
E	Battery-powered electric motor


Truck	
Truck* Total weight (min.)	≥ 26.00 t

*depending on truck type


Fly jib

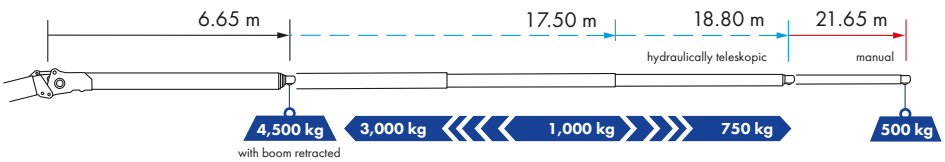

Outriggers

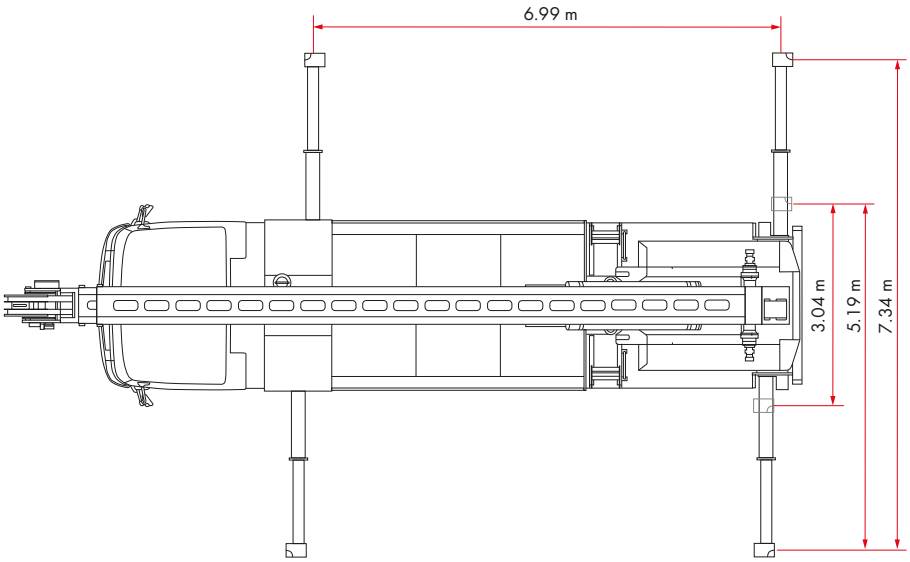

Truck (MAN TGS)

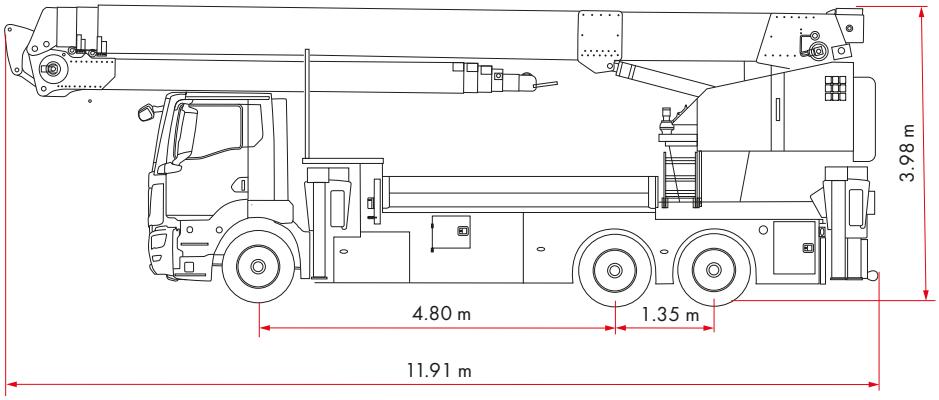

Subject to technical changes. All specifications are approximate and depending on truck type.
Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.

08/2026

K2350

klaas.com

klaas.ascheberg
klaas_alukranbau
KlaasAscheberg

Klaas Service- & Vertriebs GmbH
Haselburger Damm 25 · D-59387 Ascheberg
Telefon +49 (0) 25 93 - 95 92-0
E-Mail: info@klaas.com

klaas24.com