
Klaas K280



Working range



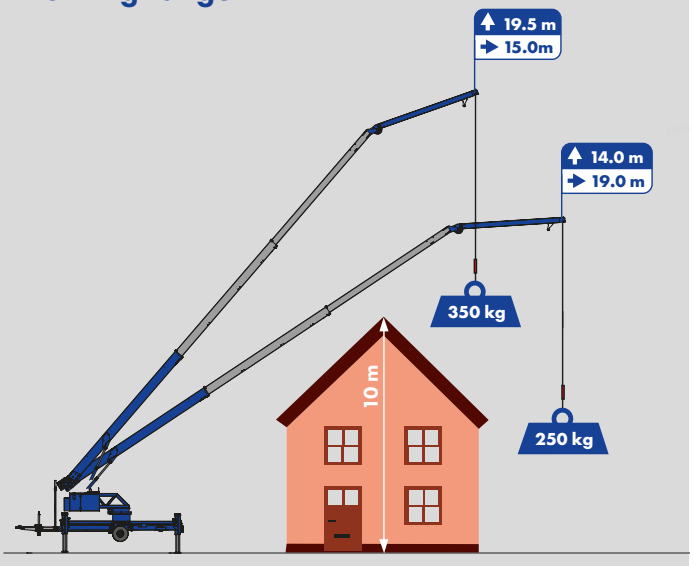

- Hook height 26 m
- max. capacity 1.000 kg
- optionally with battery-powered electric motor

09/2026

Klaas K280

Technical specifications

Load capacity	
Hook load	1,000 kg
Winch capacity	1,000 kg

Boom	
Hook height	26.00 m
Working height up to the boom	22.30 m
Swivel range	Continuous rotation

Fly jib	
Fly jib (1.000 kg)	5.15 m

H-Outriggers	
Outriggers (max.) L x W	4.80 x 4.88 m
Outrigger width (min.)	3.88 m
Outrigger width 1-sided support	4.38 m

Drive concepts	
D	Diesel engine
E	Battery-powered electric motor


Vehicle	
Vehicle height	2.55 m
Vehicle width	2.09 m
Vehicle length	9.22 m
Towing capacity	2.8 - 3.5 t

Working range crane operation


Load	Range	Height
250 kg	19.00 m	14.00 m
350 kg	16.00 m	11.00 m
500 kg	13.00 m	15.00 m
750 kg	8.50 m	19.00 m
1,000 kg	6.00 m	20.00 m

K280


Working range diagram

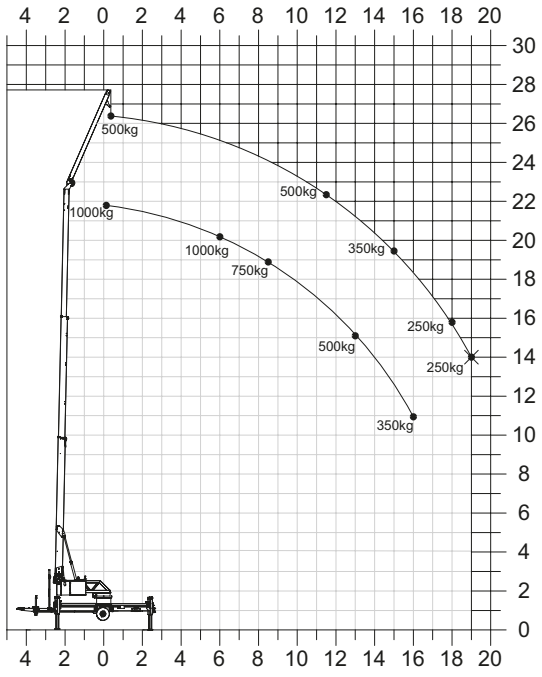


Fly jib

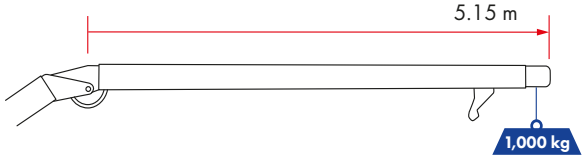

Outriggers

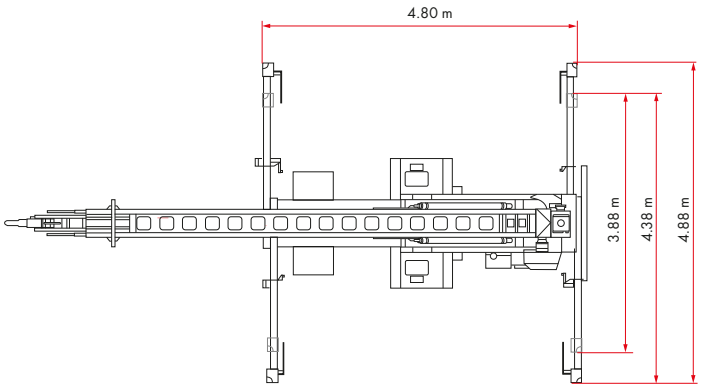

Vehicle

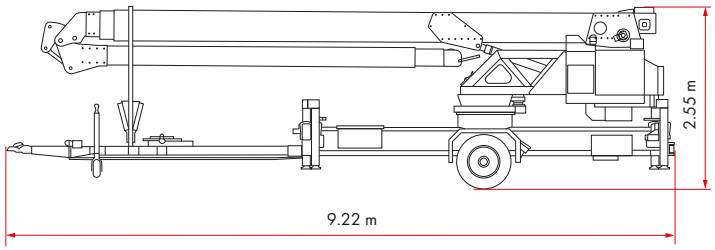

Subject to technical changes. All specifications are approximate and depending on truck type.
Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.

09/2026