




Klaas

K300 E



Working range

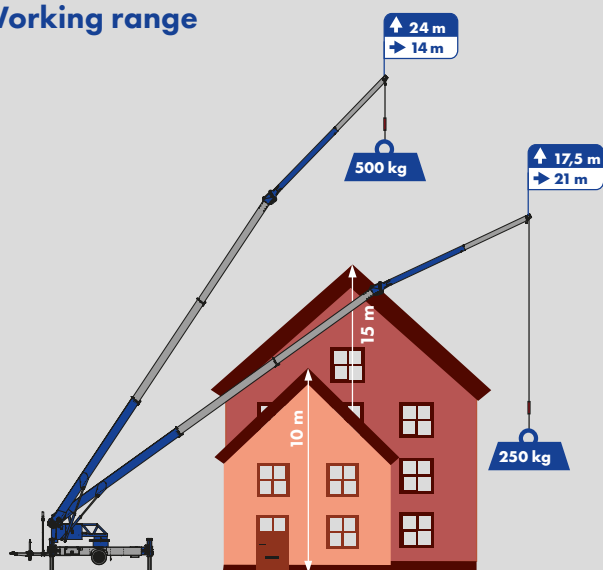

► Hook height 29 m / Boom length 30.8 m

► max. capacity 1,500 kg

► powerful battery for long running times



Klaas

K300 E

Technical specifications

Load capacity	
Hook load	1,500 kg
Winch capacity	1,500 kg

Boom	
Hook height	29.00 m
Boom length	30.80 m
Working height up to the boom	21.70 m
Swivel range	Continuous rotation

Fly jib	
Fly jib (1.500 kg)	5.46 m
Extension 1 (800 kg)	9.12 m

H-Outriggers	
Outriggers (max.) L x W	4.80 x 5.05 m
Outrigger width (min.)	2.86 m
Outrigger width 1-sided support	3.94 m


Drive concepts	
E	Battery-powered electric motor

Vehicle	
Vehicle height	2.50 m
Vehicle width	2.29 m
Vehicle length	9.22 m
Towing capacity	3.5 t


Working range crane operation

Load	Range	Height
250 kg	21.00 m	17.50 m
500 kg	14.00 m	24.00 m
800 kg	9.50 m	24.50 m
1.000 kg	8.00 m	20.80 m
1.500 kg	4.50 m	22.00 m


Working range diagram

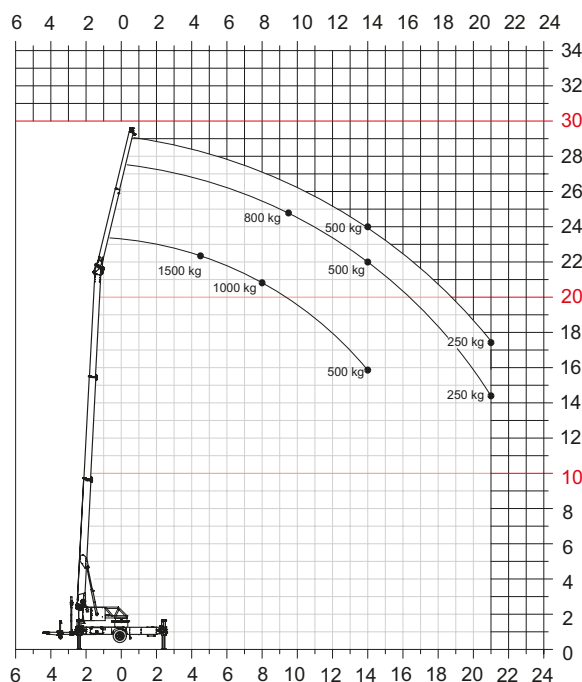


Fly jib

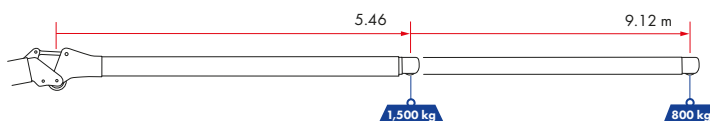

Outriggers

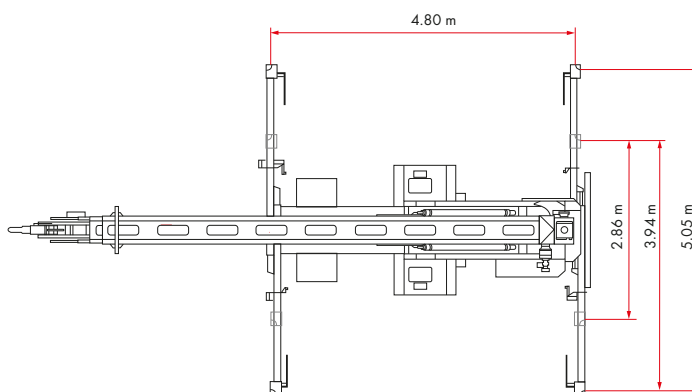

Vehicle

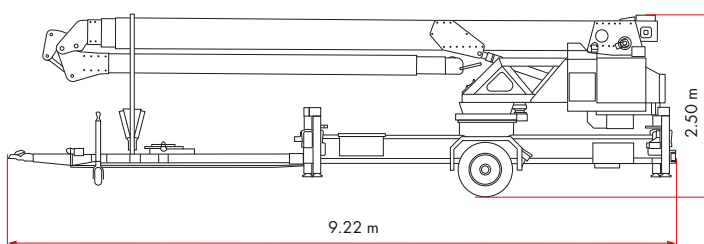

Subject to technical changes. All specifications are approximate and depending on truck type. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.



K300 E